KST®

www.kstsz.de

DS565X

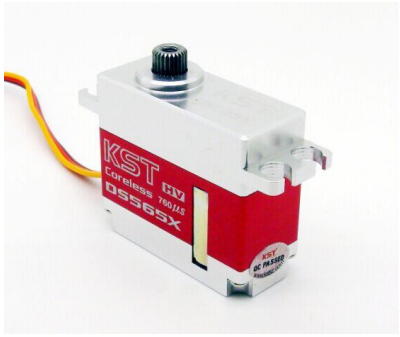

Operating Voltage:DC6.0V-8.4V

Size: 35.5*15*32.5mm

Torque:

4.0Kg.cm@6.0V 5.0Kg.cm@7.4V 6.0Kg.cm@8.4V

Speed: 0.06sec/60° @6.0V 0.05sec/60° @7.4V

0.04sec/60° @8.4V

Weight: 40g

Working Frequence: 760us

Motor:Φ 15mm Coreless Ball Bearing: 2BB
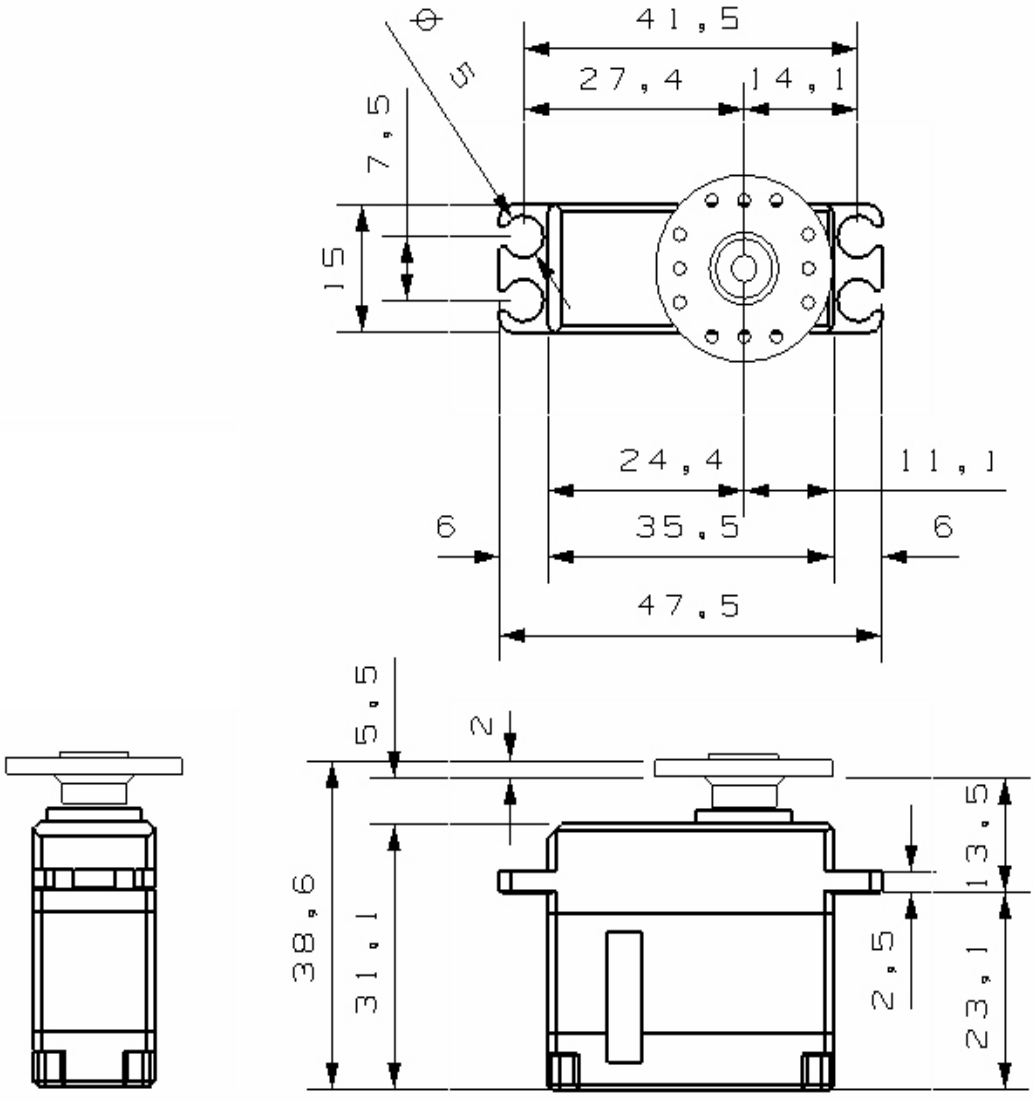
Fit for 450 ,500 class tail